




## MSAP5521AMA

### 55" 4K High Resolution Medical Display

- > IP65 in front & IPx1 whole unit
- > ALS (optional)
- > GPIO Remote control (optional)
- > UHD signals configuration
- > Full mode: one UHD signal input (DVI or DP)
- > Dual mode: 2 signal inputs PBP or PIP
- > Quad mode: 4 FHD signal inputs

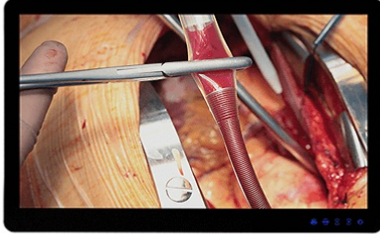

#### + Spec

Panel	
LCD Size	55"
Display Type	4K
Resolution	3840x2160
Luminance	380 Cd/m2
Contrast ratio	4000:1
Viewing angle	89/89 Deg. Horizontal & Vertical
Backlight	LED
Touch Type	Projective Capacitive
AG Protection Glass	Yes
DICOM compliant	Yes
I/O	
USB	1 x USB HUB
VGA	1 x VGA
DVI	4 x DVI
Display Port	2 x Display Port
RS232	Yes
Mechanical & Environmental	
Power Type	AC In
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Operating Humidity	10%~90% Relative Humidity, Non-condensing
Weight	46 Kgs
Construction	GM Metal
Mounting Kit	Stand (Optional) VESA Mount kit (Optional) Wall Mount kit (Optional)
Vibration Test	With SSD/mSATA: 1.5Grms, IEC 60068-2-64, Random, 5 ~ 500Hz, 30min/axis
Shock Test	With SSD/mSATA: 10Grms, IEC 60068-2-27, Half Sine, 11ms
System Fan	Fanless
Dimension	1314.6 x 785.4 x 85 mm
Certifications	
Certification Information	CE(EN60601-1,EN60601-1-2) FCC certified cTUVus certified

#### + Ordering

RCC-MM-GMD55G-01R (MSAP5521AMA01)  
 MSAP5521AMA with AG Glass  
 55"/LED/AG Glass/Metal Case/3840x2160/400nits/4000:1  
 DV1x4/DPx2/VGA/USB HUB  
 Delta 400W PSU  
 Without: Power cord, DVI cablex2/DP cablex2/USB cablex1/VGA cablex1

RCC-MM-GMD55T-01R (MSAP5521AMA02)  
 MSAP5521AMA with AG PCAP  
 55"/LED/AG PCAP/Metal Case/3840x2160/380nits/4000:1  
 DV1x4/DPx2/VGA/USB HUB  
 Delta 400W PSU  
 Without: Power cord, DVI cablex2/DP cablex2/USB cablex1/VGA cablex1